


Features

- 40A Contact change-over Capacity
- The Voltage endurance is 2.5KV
- Between contact and coil
- Suitable for Control of Kinds of Circuits
- Excellent Shake Resistance Performance
- With Couple Socket

Automotive Relay

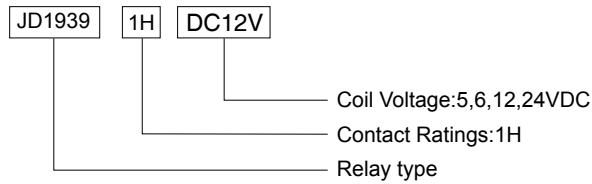

JD1939



Contact Ratings

Contact Ratings	1H
Contact Resistance	50MΩ (1A 6VDC)
Contact Material	AgCdO
Contact Capacity	60A,80A 140VDC

Specification

Insulation Resistance	100MΩ .500VDC		
Dielectric Strength	BCC	500V	1min
	BOC	500V	1min
Operate Time	15ms/10ms		
Terminal Type	Terminal mounting		


Coil Ratings

Nominal Coil Power	1.8W
--------------------	------

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ± 10%
5	3.50	0.50	16
6	4.20	0.60	18
12	8.40	1.20	80
24	16.8	2.40	324

Dimension.Bottom View

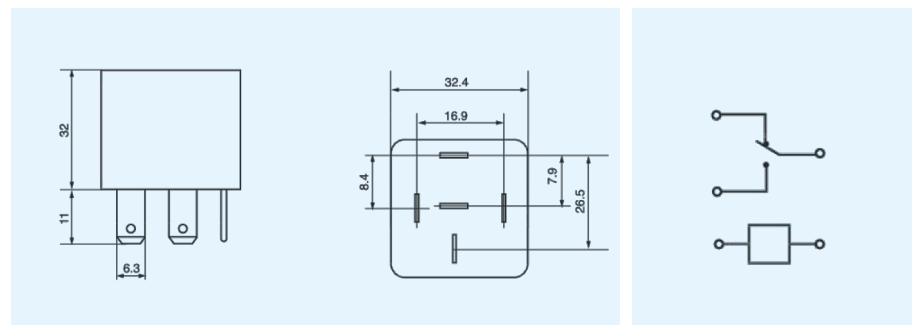

Reference Data

